


## FIELDERS PANELFORM

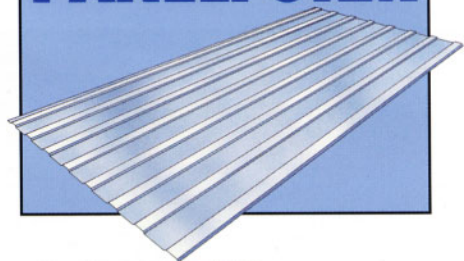

**MATERIAL** (conforms to AS 1397 & AS 2728)


**Zincalume®** – AZ150 coating, G550 Tensile strength.

**Colorbond®** – XRW pre-painted finish - AZ150 base coating.

### SHEET TOLERANCES

Length  $\pm 10$ mm

Width  $\pm 4$ mm

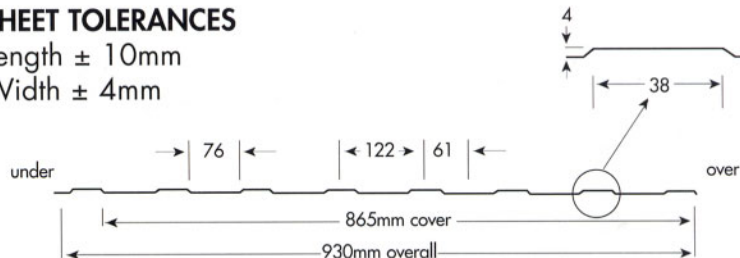

### FASTENER SELECTION

Fasteners should be selected to match the grade of roofing material. Zincalume and Colorbond XRW - Coating of fasteners shall comply with AS 3566 Class 3 for exterior applications e.g. Climaseal.

**Fixing to Steel** (1.0 to 4.5mm thick)  
10-16 x 16mm Hex. Head Self-drilling and Tapping Screws.

**Fixing to Timber** 12-11 x 25mm Hex. Head Type 17 Self-drilling Screws.


*Note: All fasteners used externally should be fitted with a EPDM seal (washer).*

**Side Lap fastener** Aluminium 4-2 rivet.

### SPAN\*

Thickness (mm) BMT	Mass (kg/m <sup>2</sup> )	Max. recommended spacing of supports for normal conditions (mm)	
		Wall	Ceiling
.42	3.7	600	450

### FASTENER SPACINGS\*\*



If used externally, Panelform should be lapped away from the prevailing weather.

\*\* normal application, non-cyclonic areas.